


## HIGH POWER DIODE LASER

*ALC-1550-3500-HHL*

The High Heat Load (HHL) packaged diode laser is an ideal component for quick prototyping and laboratory setups. It features a built-in thermo-electric cooler (TEC), thermistor for the temperature measurements and a power monitor. The output beam is precisely collimated and circularized.


### Applications

- Medical
- Material processing

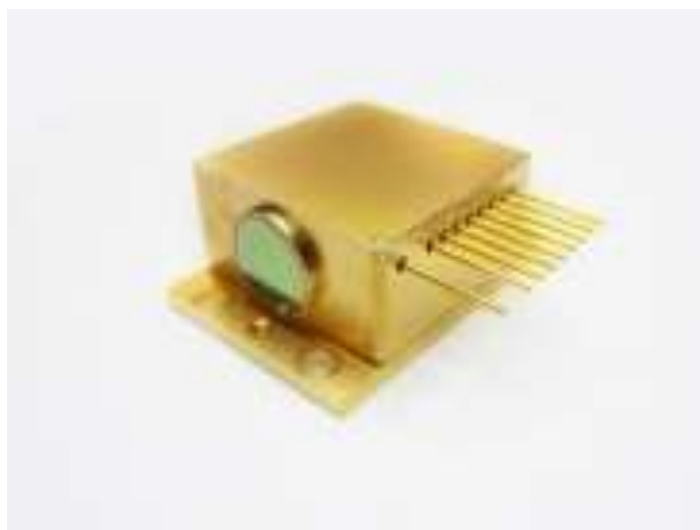

### Specifications

Optical Parameters	Units	
Center Wavelength	nm	1550
Wavelength Tolerance	nm	±10
Spectral Width (FWHM)	nm	8
Wavelength Temp. Coefficient	nm/°C	0.5
Output Power	W	3.5
Operating Current	A	10.5
Operating Voltage	V	<1.5
Threshold Current	A	0.7
Beam divergence fast axis, FWHM	mrad	<1
Beam divergence slow axis, FWHM	mrad	<1

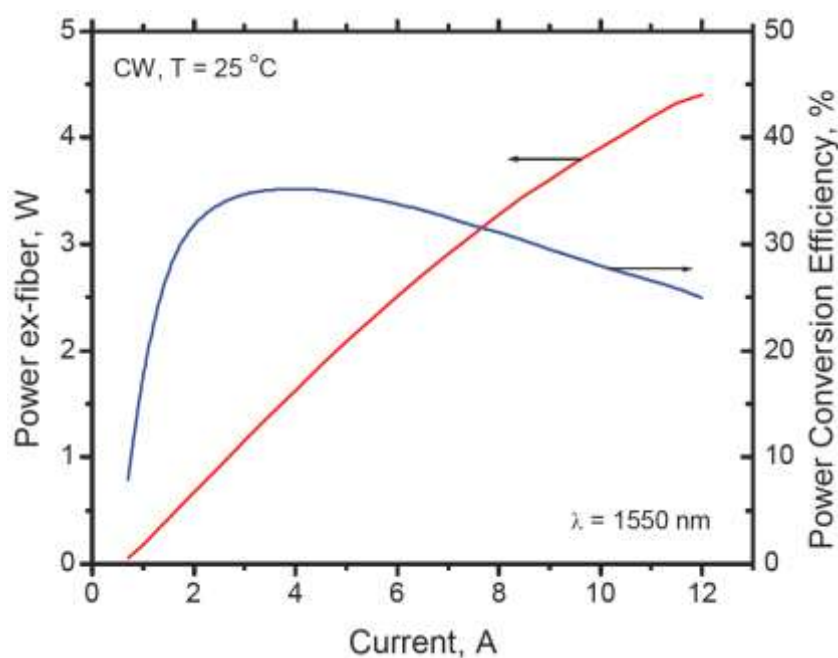

These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications.