


HIGH POWER DIODE LASER

ALC-515-0100-HHL

The High Heat Load (HHL) packaged diode laser is an ideal component for quick prototyping and laboratory setups. It features a built-in thermo-electric cooler (TEC), thermistor for the temperature measurements and a power monitor. The output beam is precisely collimated and circularized.

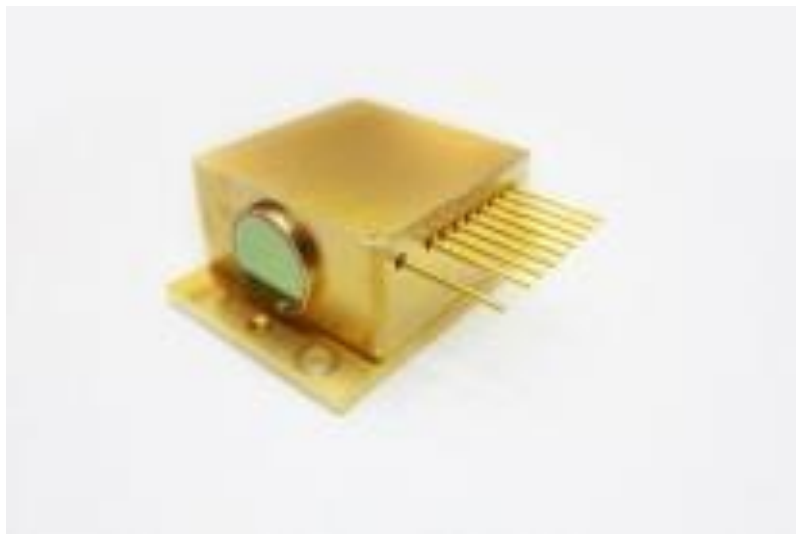


Applications

- Research
- Medical

Specifications

Optical Parameters	Units	
Center Wavelength	nm	515
Wavelength Tolerance	nm	±5
Spectral Width (FWHM)	nm	2.3
Wavelength Temp. Coefficient	nm/°C	0.04
Output Power	mW	>90
Operating Current	mA	250
Operating Voltage	V	<7.0
Threshold Current	mA	60
Beam divergence fast axis, FWHM	mrاد	<1
Beam divergence slow axis, FWHM	mrاد	<1

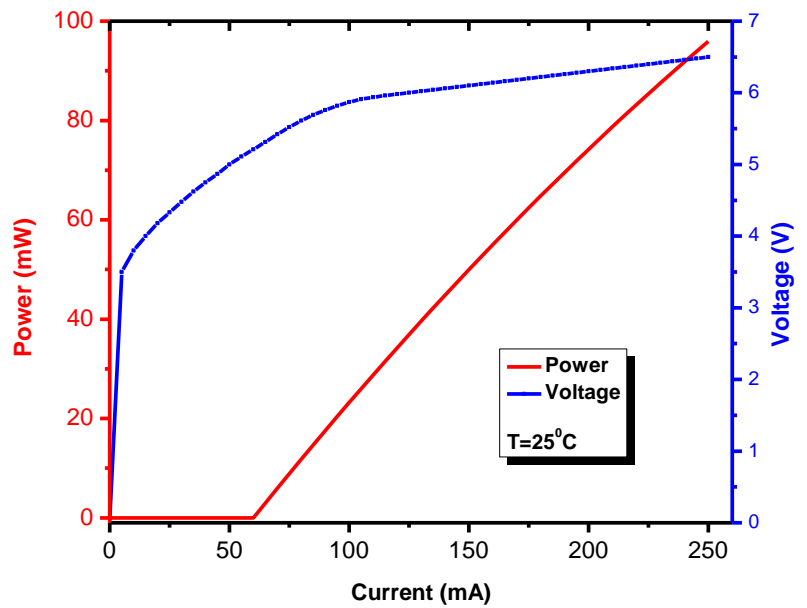

These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications.