


HIGH POWER DIODE LASER

ALC-635-1100-FB

The F-mount is an ideal component for quick prototyping and laboratory setups.




Applications

- Medical
- Solid State Laser Pumping

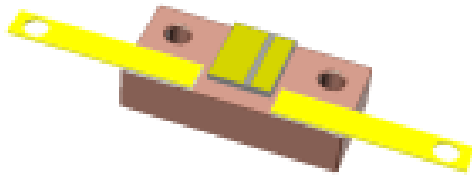

Specifications

Optical Parameters	Units	
Center Wavelength	nm	635
Wavelength Tolerance	nm	±3
Spectral Width (FWHM)	nm	1.0
Wavelength Temp. Coefficient	nm/°C	0.38
Output Power	mW	>1100
Operating Current	A	2.8
Operating Voltage	V	<2.25
Threshold Current	A	1.2
Emitter width	µm	300
Beam divergence fast axis, FWHM	degrees	34
Beam divergence slow axis, FWHM	degrees	7

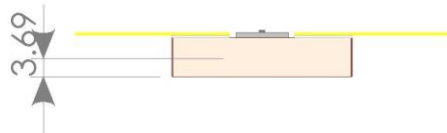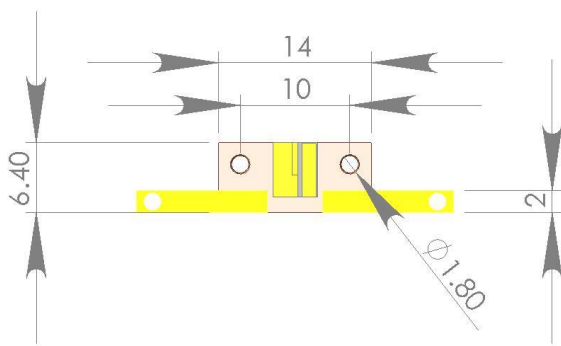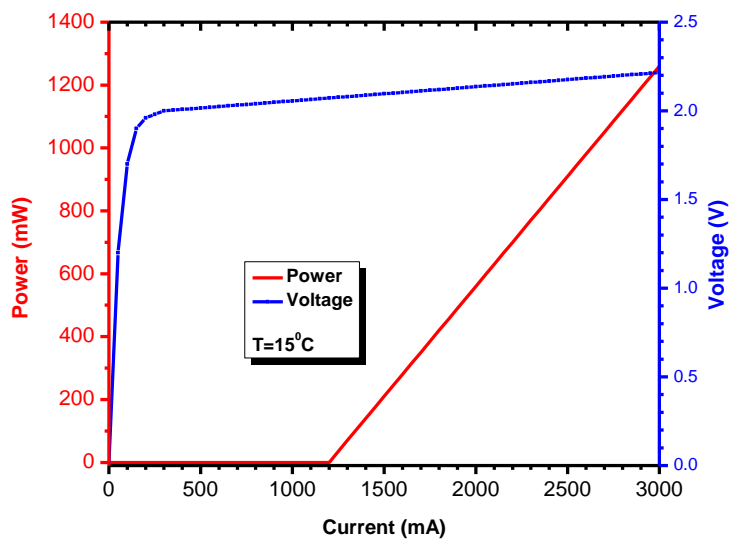

These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications.