


## HIGH POWER DIODE LASER

*ALC-885-5000-FB*

The F-mount is an ideal component for quick prototyping and laboratory setups.



### Applications

- Pumping Nd:YAG Solid State Laser
- Medical
- Material Processing

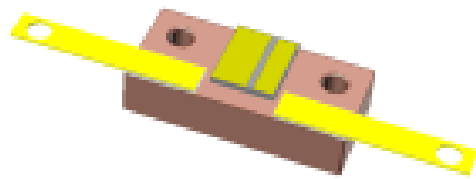

### Specifications

Optical Parameters	Units	
Center Wavelength	nm	885
Wavelength Tolerance	nm	±10
Spectral Width (FWHM)	nm	3.0
Wavelength Temp. Coefficient	nm/°C	0.3
Output Power	W	5.0
Operating Current	A	4.6
Operating Voltage	V	<2.1
Threshold Current	mA	350
Emitter width	μm	150
Beam divergence fast axis, FWHM	degrees	44
Beam divergence slow axis, FWHM	degrees	7

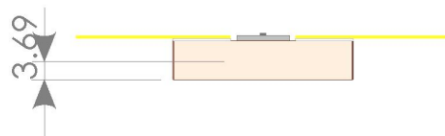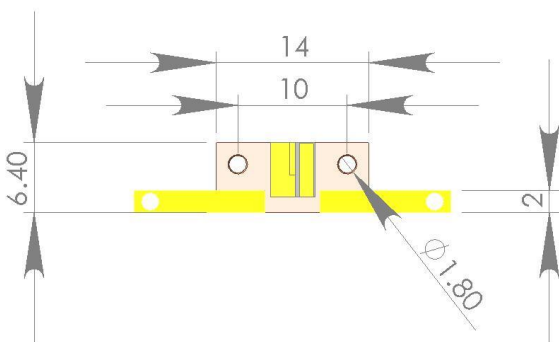

These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications.