

## HIGH POWER DIODE LASER


*ALC-915-12000-CB*

The C-mount is an ideal component for quick prototyping and laboratory setups. However, the maximum output power is typically limited by the inherently sub-optimal heat dissipation properties of the C-mount itself.

Please contact us to discuss the best package option for your application.


### Applications

- Pumping Yb Fiber Laser
- Medical
- Material Processing

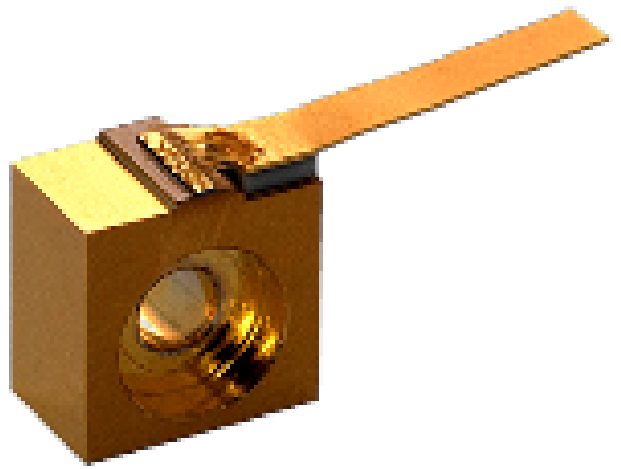

### Specifications

Optical Parameters	Units	
Center Wavelength	nm	910
Wavelength Tolerance	nm	±10
Spectral Width (FWHM)	nm	3.0
Wavelength Temp. Coefficient	nm/°C	0.3
Output Power	W	12
Operating Current	A	12
Operating Voltage	V	<2.4
Threshold Current	mA	550
Emitter width	µm	94
Beam divergence fast axis, 95%	degrees	58
Beam divergence slow axis, 95%	degrees	10.5

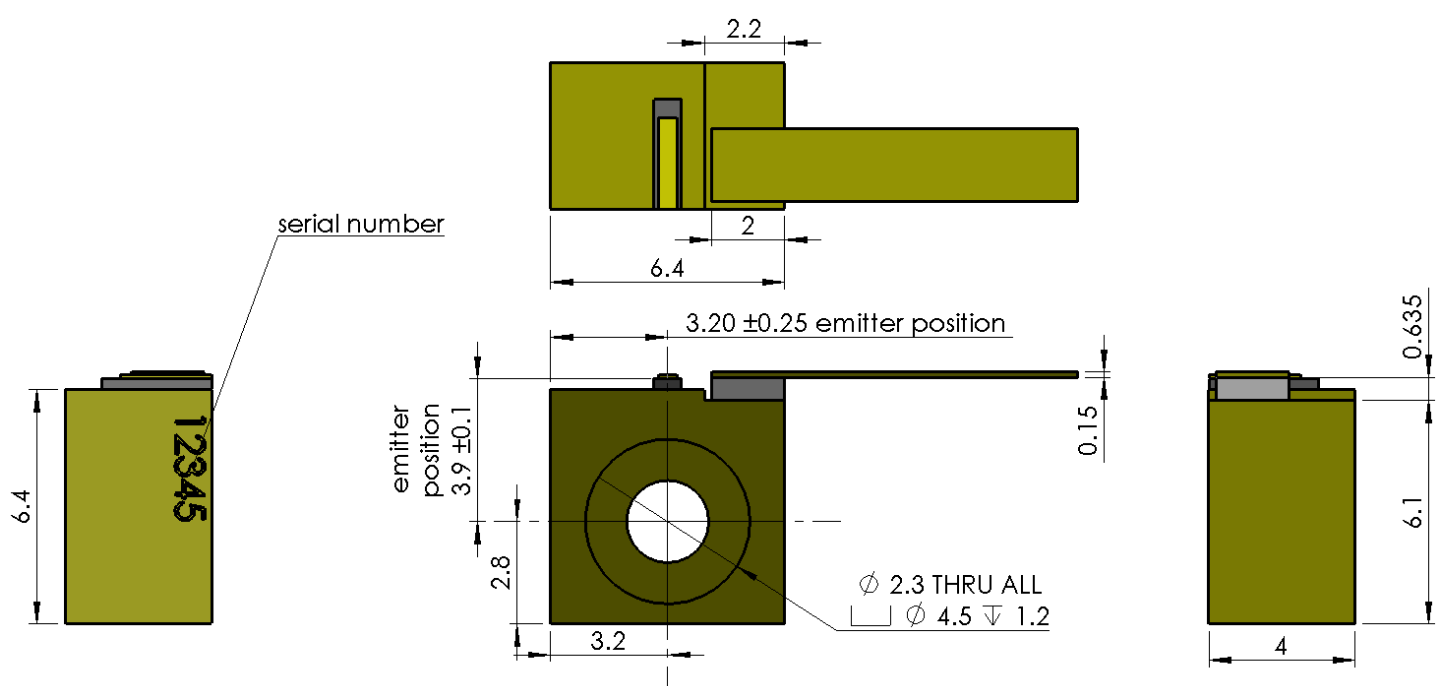

These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications

## AKELA Laser Corporation

1095 Cranbury South River Road, Suite 14, Jamesburg, NJ 08831, USA

Phone: (732) 305-7105 e-mail: info@AKELALaser.com web: www.AKELALaser.com