

HIGH POWER LASER MODULE WITH FIBER OUTPUT

RED-BLUE-GREEN (RBG) / 2.5W IN FIBER

FEATURES

- Compact size
- Detachable fiber
- Thermal sensor
- Power monitor
- Fiber sensor (for package without thermoelectric cooler / TEC)
- Built-in TEC (for package without fiber sensor / FS)

APPLICATIONS

- Medical
- Illumination
- Displays



SPECIFICATIONS

Parameters	Unit	Values		
Center Wavelength	nm	450	520	638
Wavelength Tolerance	nm	±10	±10	±10
Spectral Width	nm	<3	<3	<3
Power	W	1.0	0.7	0.8
Operating Current	A	1.4	1.6	1.4
Operating Voltage	V	5.0	4.6	2.3
Fiber Core Diameter	μm	200		
Fiber NA		0.22		
Fiber Connector		SMA		

Features	Unit	Value / Description
NTC Thermistor (included)	kΩ	10 @ 25 °C
Power Monitor (included)	mA	0.1-1
Fiber Sensor (FS, optional)		See description in the drawing of the package with FS
Built-in TEC (optional)		See specs in the drawing of the package with TEC

AKELA Laser Corporation


1095 Cranbury South River Road, Suite 14, Jamesburg, NJ 08831, USA

Phone: (732) 305-7105 e-mail: info@AKELALaser.com web: www.AKELALaser.com

MECHANICAL DRAWINGS

PACKAGE WITH FIBER SENSOR / WITHOUT TEC

Package footprint
50 mm x 65 mm,
designed for use
with high-power
TEC with footprint
40 mm x 40 mm

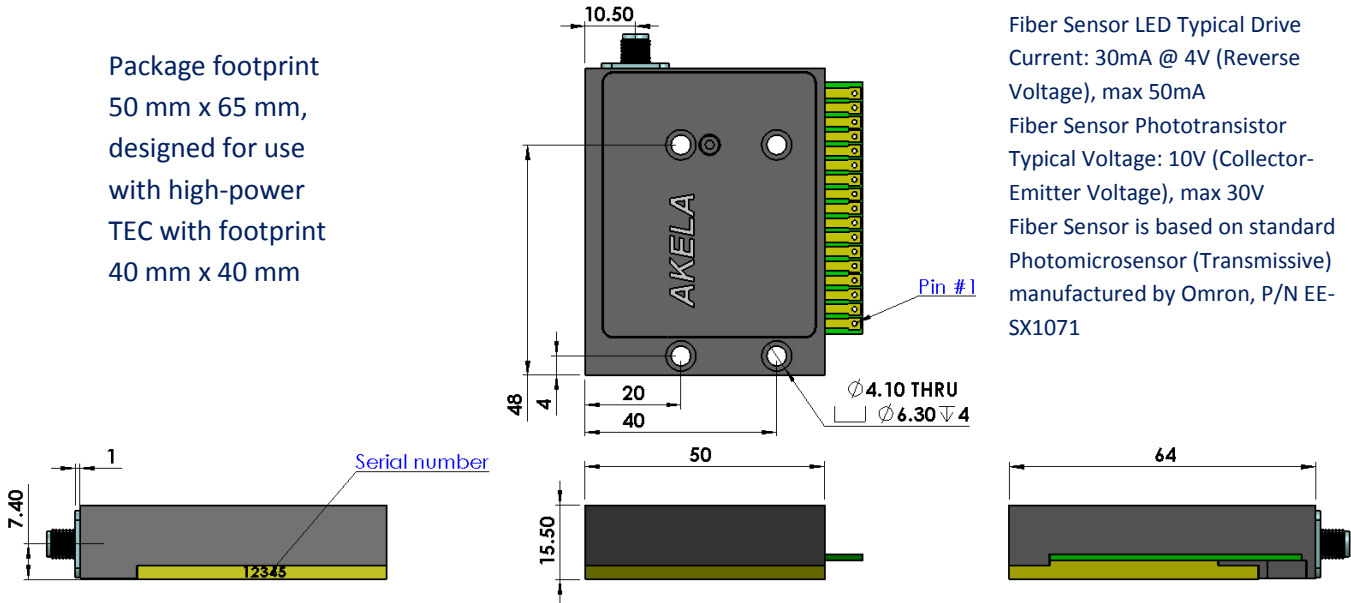


Fiber Sensor LED Typical Drive
Current: 30mA @ 4V (Reverse
Voltage), max 50mA

Fiber Sensor Phototransistor
Typical Voltage: 10V (Collector-
Emitter Voltage), max 30V

Fiber Sensor is based on standard
Photomicrosensor (Transmissive)
manufactured by Omron, P/N EE-
SX1071

PACKAGE WITH TEC / WITHOUT FIBER SENSOR

Package footprint
50 mm x 52 mm,
suggested cold
plate (heatsink) size
not less than
40 mm x 52 mm

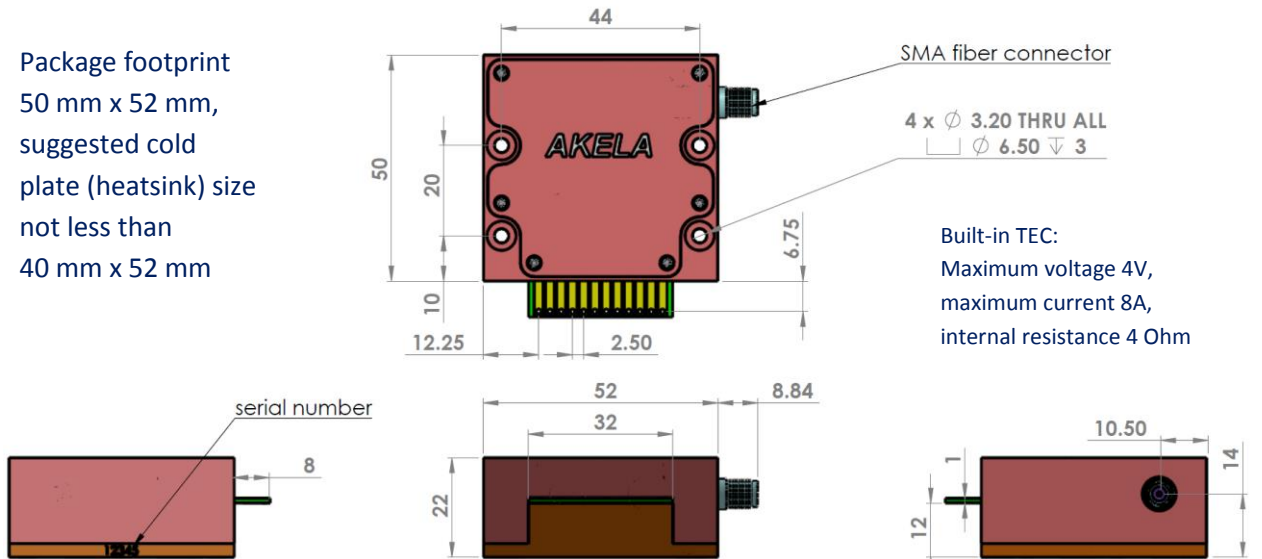

Built-in TEC:
Maximum voltage 4V,
maximum current 8A,
internal resistance 4 Ohm

AKELA Laser Corporation

1095 Cranbury South River Road, Suite 14, Jamesburg, NJ 08831, USA

Phone: (732) 305-7105 e-mail: info@AKELALaser.com web: www.AKELALaser.com

PINOUT

PACKAGE WITH FS / WITHOUT TEC

Pin #	Function
1	450 nm LD (+)
2	450 nm LD (-)
3	Power Monitor PD (+)
4	Power Monitor PD (-)
5	520 nm LD (+)
6	520 nm LD (-)
7	Thermistor
8	Thermistor
9	638 nm LD (+)
10	638 nm LD (-)
11	FS phototransistor collector
12	FS phototransistor emitter
13	FS LED cathode
14	FS LED anode

PACKAGE WITH TEC / WITHOUT FS

Pin #	Function
1	TEC (-)
2	450 nm LD (+)
3	450 nm LD (-)
4	Power Monitor PD (+)
5	Power Monitor PD (-)
6	520 nm LD (+)
7	520 nm LD (-)
8	Thermistor
9	Thermistor
10	638 nm LD (+)
11	638 nm LD (-)
12	TEC (+)

MODULE CONFIGURATION NOTES

The module can be built with all three wavelengths included, with any two wavelengths included, or only with a single wavelength. Please refer to the following model numbers when ordering models with different configurations.

Colors included	Model numbers in package with FS / without TEC	Model numbers in package with TEC / without FS
RED-BLUE-GREEN	ALC-RBG-02500-FM200.22-QFS	ALC-RBG-02500-FM200.22-QTEC
RED-GREEN	ALC-2WL11-01500-FM200.22-QFS	ALC-2WL11-01500-FM200.22-QTEC
RED-BLUE	ALC-2WL12-01800-FM200.22-QFS	ALC-2WL12-01800-FM200.22-QTEC
BLUE-GREEN	ALC-2WL13-01700-FM200.22-QFS	ALC-2WL13-01700-FM200.22-QTEC
RED	ALC-0637-00800-FM200.22-QFS	ALC-0637-00800-FM200.22-QTEC
BLUE	ALC-0450-01000-FM200.22-QFS	ALC-0450-01000-FM200.22-QTEC
GREEN	ALC-0520-00700-FM200.22-QFS	ALC-0520-00700-FM200.22-QTEC



These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications

AKELA Laser Corporation

1095 Cranbury South River Road, Suite 14, Jamesburg, NJ 08831, USA

Phone: (732) 305-7105 e-mail: info@AKELALaser.com web: www.AKELALaser.com