

HIGH POWER DIODE LASER


ALC-793-4000-CB

The C-mount is an ideal component for quick prototyping and laboratory setups. However, the maximum output power is typically limited by the inherently sub-optimal heat dissipation properties of the C-mount itself.

Please contact us to discuss the best package option for your application.



Applications

- Medical
- Research

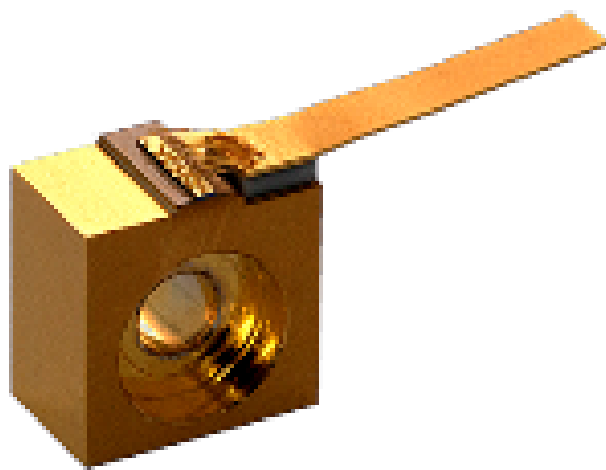

Specifications

Optical Parameters	Units	
Center Wavelength	nm	793
Wavelength Tolerance	nm	±4
Spectral Width (FWHM)	nm	3.0
Wavelength Temp. Coefficient	nm/°C	0.4
Output Power	mW	4000
Operating Current	mA	4000
Operating Voltage	V	<2.0
Threshold Current	mA	700
Emitter width	µm	90
Beam divergence fast axis, FWHM	degrees	32
Beam divergence slow axis, FWHM	degrees	11

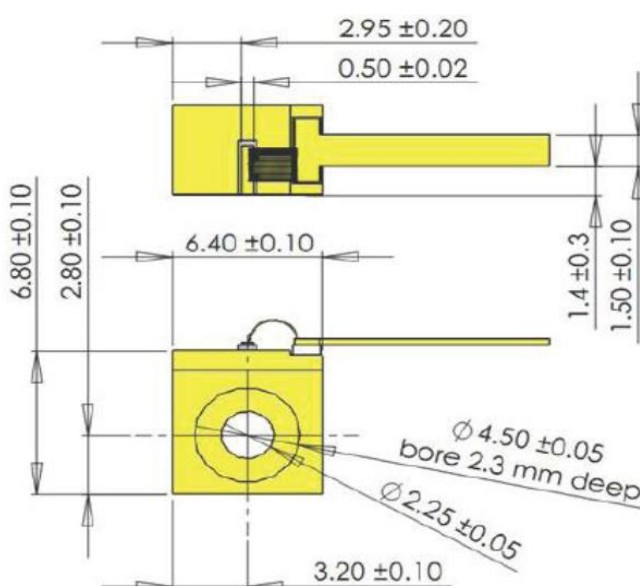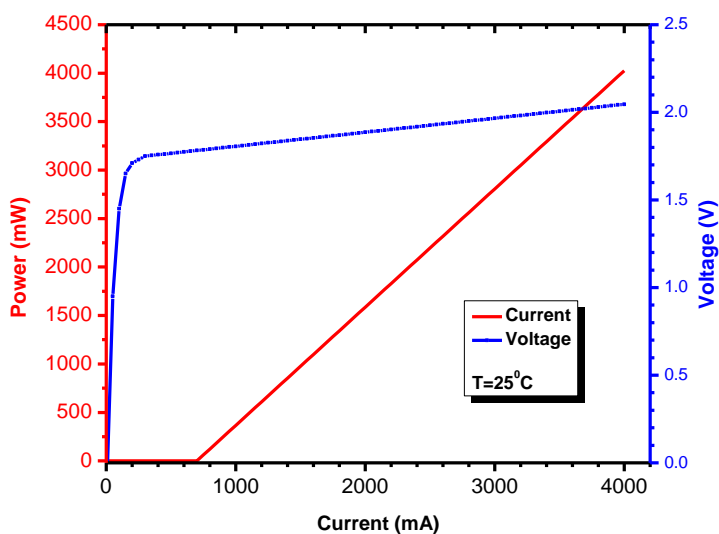

These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications.